Rawa'a AlThuriya





+966 56 642 8459



info@rth.sa




www.rth.sa



Door Details

Fire Proof Door



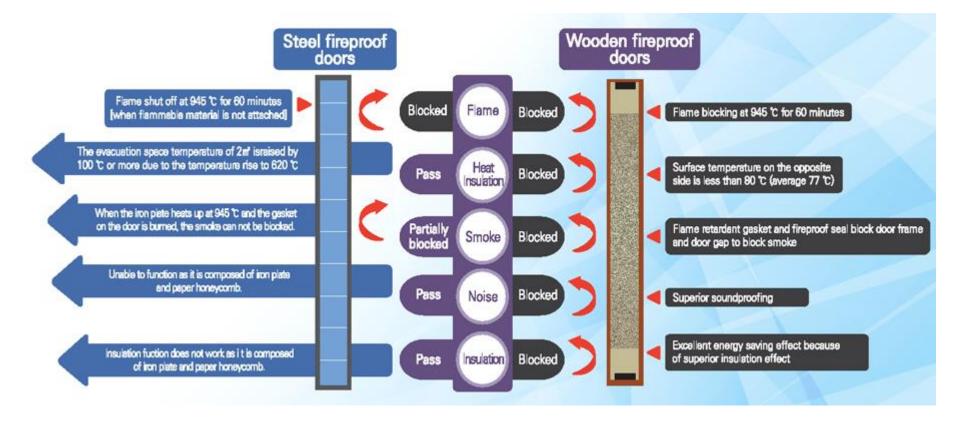

- Ensure The insulation for 88 minutes and Flame blocking for 88 minutes
- Excellent ability to prevent condensation
- Excellent insulation performance
- Environmentally-friendly products

- Highly durable, without deformation
- Sophisticated design for aesthetic sense
- Excellent sound insulation and sound absorption

Fire Proof Door











Dimensions





Veneer Door Design















TSD-101

TSD-102

TSD-103

TSD-104

TSD-200

TSD-201









TSD-203

TSD-203(f)

TSD-703(f)

TSD-704(f)

Membrane Door Design




Skin Door Design



TS-14(32)

TS-20r(08)

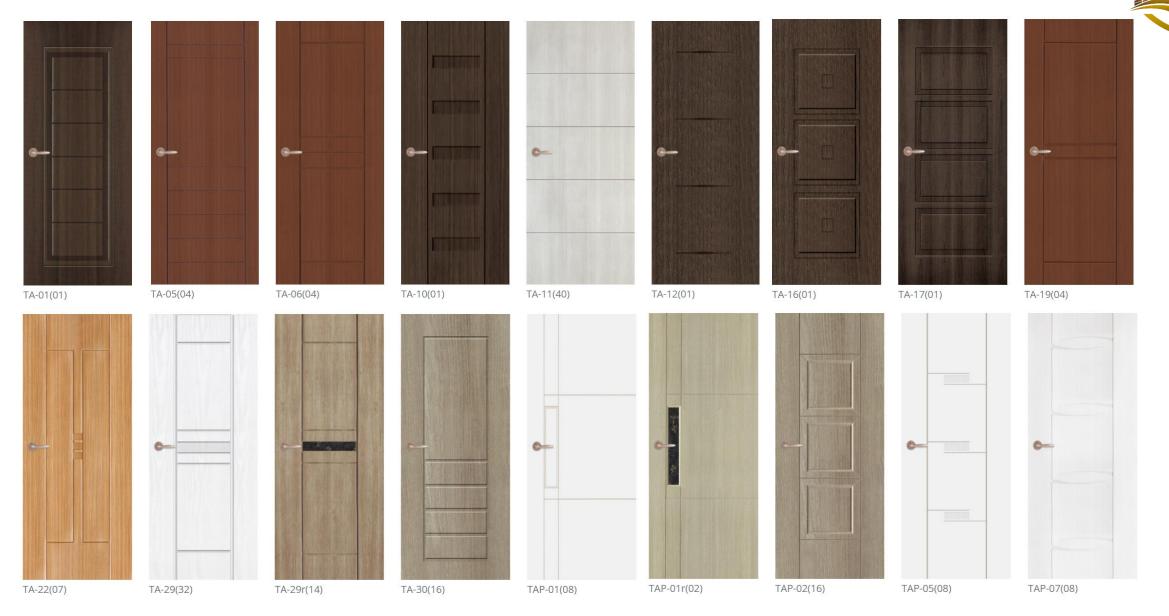









































TAP-14(32)

TAP-15(11)

TAP-15r(01)

TAP-17(11)

TAP-17(32)


TAP-18(31)


TAP-18(40)

TAP-20(16)


TAP-20r(08)

TL-09(39)

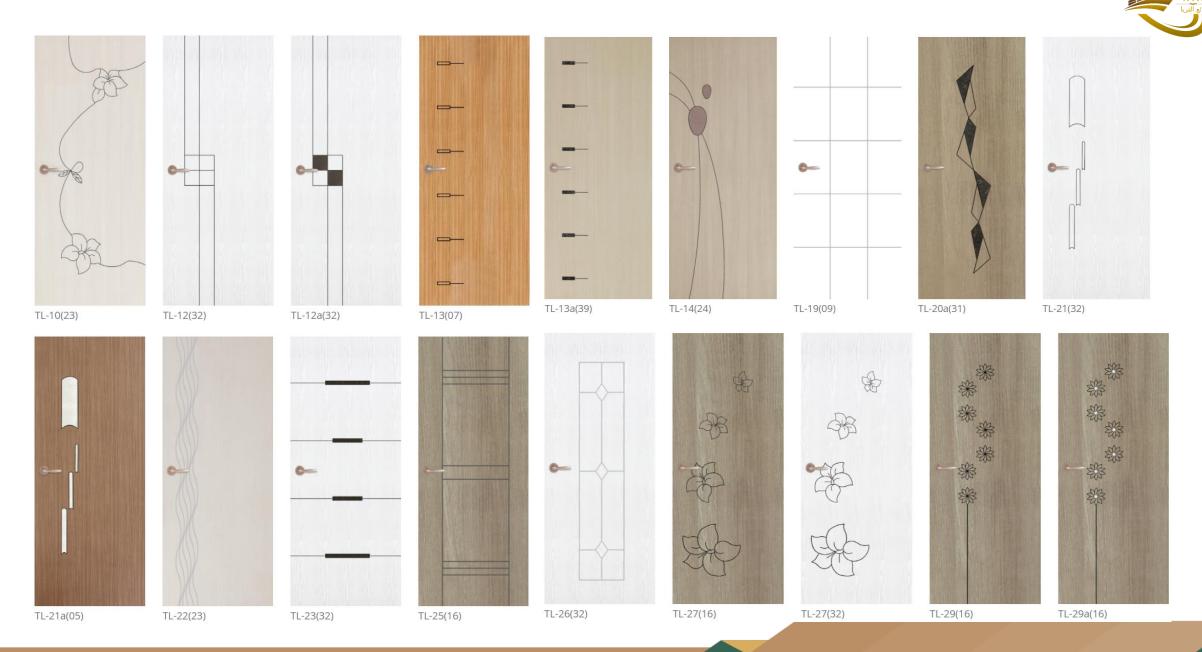

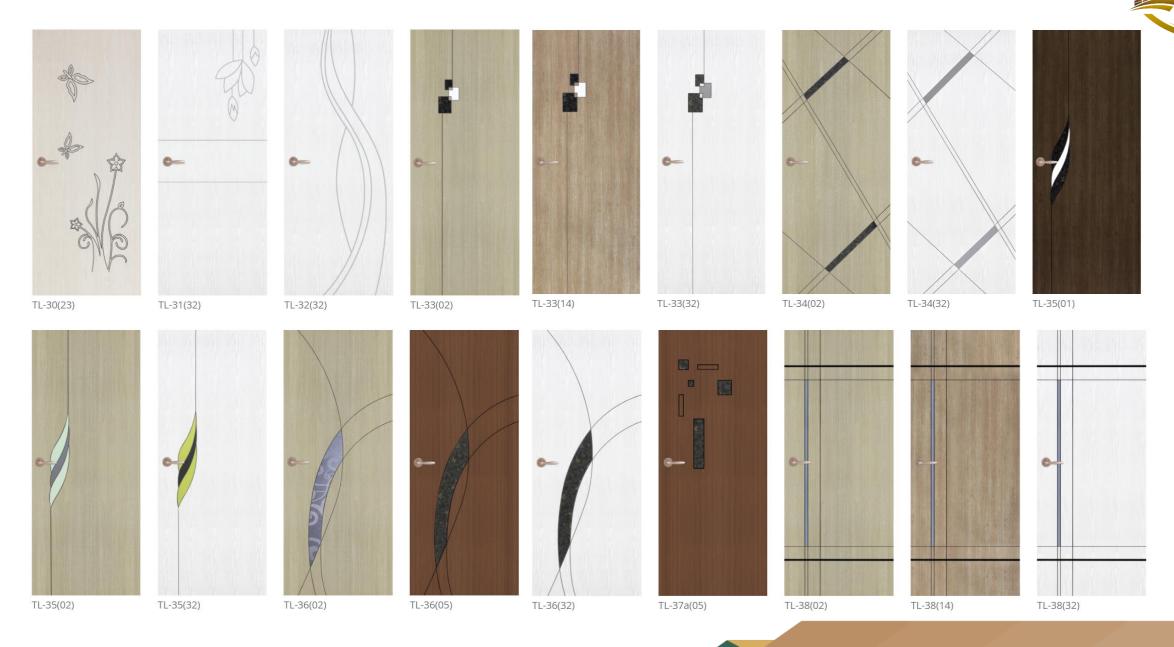



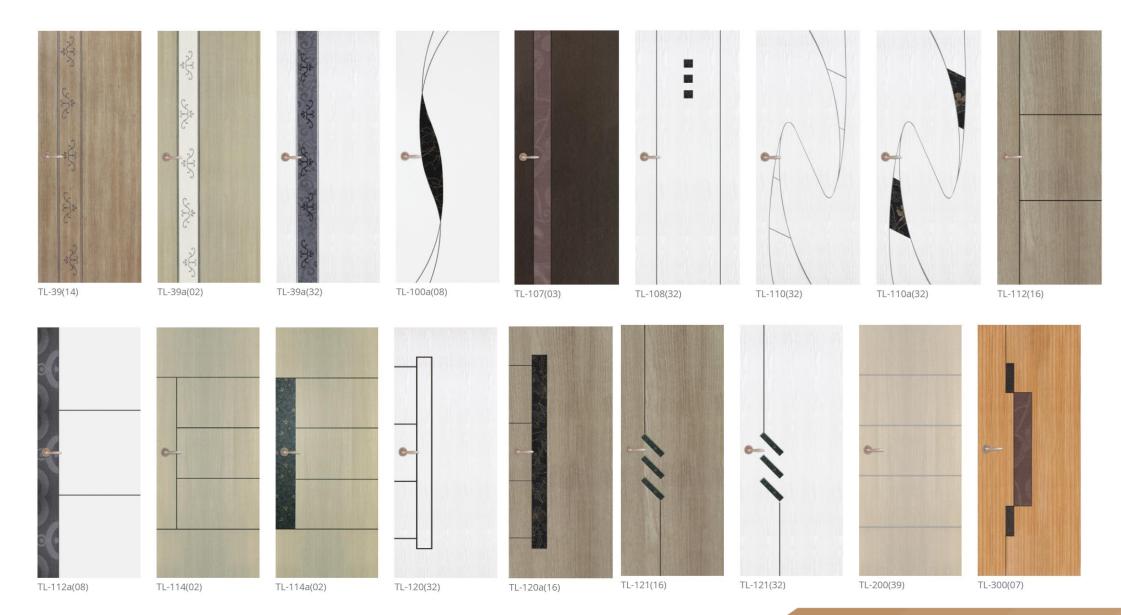

Colored(painted) Door Design





Perforated Door Design





Panel Door Design



3Peristalsis/Sliding Door Design













TG-07(01)

TG-09







TG-05(p)



TJ-11













CY-31lc_420(en)

CY-31lc_420(pn)

CY-31lx_135(ab)

CY-33ls_040(sc)

CY-33ps_090(gr)











CY-33ls_075(pc)

CY-33ls_090(gr)

CY-33ps_040(sc)

CY-33ps_075(pc)

CY-33ps_115(en)





























FRAME-omega(rail_b)


FRAME-omega(rail_ho)

FRAME-omega(rail_t)

FRAME-peristalsi(b)







FRAME-peristalsi(rail_a)



FRAME-peristalsi(rail_b)



FRAME-peristalsi(t)


















Decorative Sheet Color





Decorative Sheet Color



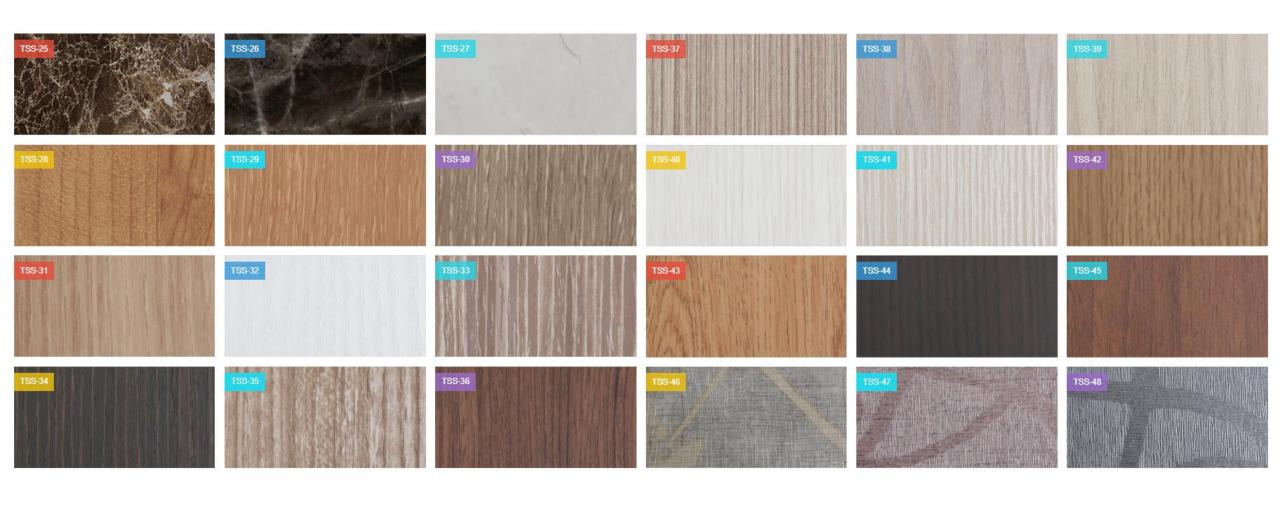

Decorative Sheet Color



